


## ISO4017/ DIN 933 Skrutka šesthranná celozávit /Hexagon head screws, full thread

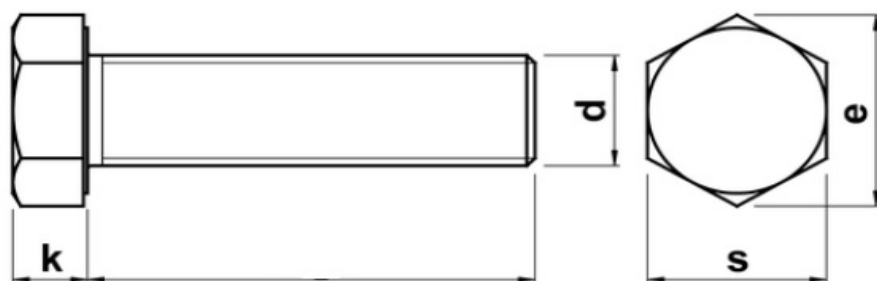

d	thread pitch	k max.	s	e
M2	0.40	1.4	4	4.32
M2.5	0.45	1.7	5	5.45
M3	0.50	2.0	5.5	6.01
M4	0.70	2.8	7	7.66
M5	0.80	3.5	8	8.79
M6	1.00	4.0	10	11.05
M7	1.00	4.8	11	12.12
M8	1.25	5.3	13	14.38
M10	1.50	6.4	16(17)	18.90
M12	1.75	7.5	18(19)	21.1
M14	2.00	8.8	21(22)	24.49
M16	2.00	10	24	26.75
M18	2.50	11.5	27	30.14
M20	2.50	12.5	30	33.53
M22	2.50	14.0	32	35.72
M24	3.00	15.0	36	39.98
M27	3.00	17.0	41	45.20

<b>d</b>	<b>thread pitch</b>	<b>k max.</b>	<b>s</b>	<b>e</b>
<b>M30</b>	3.50	18.7	46	50.85
<b>M33</b>	3.50	21.0	50	55.37
<b>M36</b>	4.00	22.5	55	60.79
<b>M39</b>	4.00	25.0	60	66.44
<b>M42</b>	4.50	26.0	65	71.3
<b>M48</b>	5.00	30.0	75	82.6