


## DIN 912 Skrutka s valcovou hlavou s vnútorným šesťhranom / Hexagon socketed head cap screws

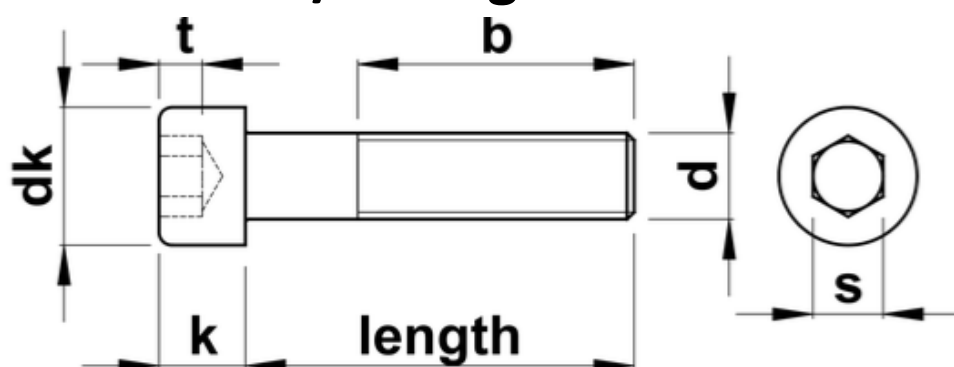

d	thread pitch	dk max.	k max.	s	b	t
M1.6	0.35	3.0	1.6	1.5	15	0.7
M2	0.40	3.8	2.0	1.5	16	1.0
M2.5	0.45	4.5	2.5	2	17	1.1
M3	0.50	5.5	3.0	2.5	18	1.3
M3.5	0.60	6.0	3.5	2.5	20	1.6
M4	0.70	7.0	4.0	3	20	2.0
M5	0.80	8.5	5.0	4	22	2.5
M6	1.00	10.0	6.0	5	24	3.0
M8	1.25	13.0	8.0	6	28	4.0
M10	1.50	16.0	10.0	8	32	5.0
M12	1.75	18.0	12.0	10	36	6.0
M14	2.00	21.0	14.0	12	40	7.0
M16	2.00	24.0	16.0	14	44	8.0
M18	2.50	27.0	18.0	14	48	9.0
M20	2.50	30.0	20.0	17	52	10.0
M24	3.00	36.0	24.0	19	60	12.0
M27	3.00	40.0	27.0	19	66	13.5
M30	3.50	45.0	30.0	22	72	15.5